



atos®

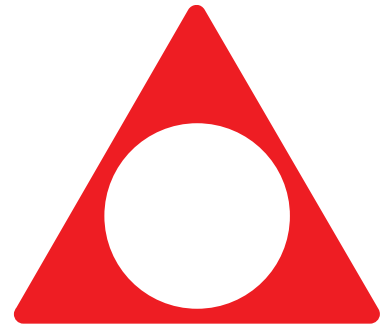

Distributed by Lynch Fluid Controls Inc.

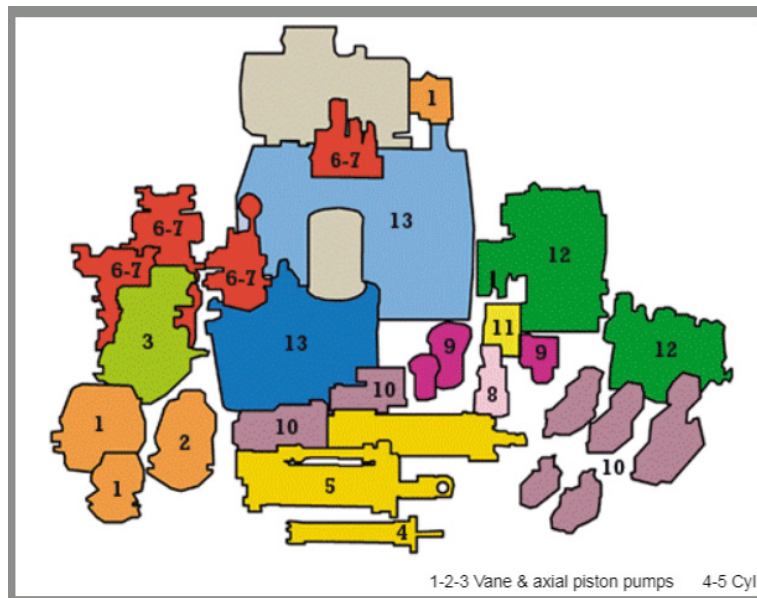

Toll Free
Tel: 1 (888) 626-4365
Fax: 1 (800) 263-5807

Local & International
Tel: +1 (905) 363-2400
Fax: +1 (905) 363-1191

Canada (Headquarters)
1799 Argentia Road
Mississauga, Ontario L5N 3A2

USA
3790 Commerce Court, Suite 500,
North Tonawanda, NY, 14120

Cartridge Valves

Slip-in cartridge valves 2-way		ISO 7368	$\Delta p = 6 \text{ bar}$	
SC LI	Basics for 2-way cartridge valves - ISO 7368	16 ÷ 100	60 ÷ 8000	H003
SHLI SHLIR	2 way, high flow cartridges with optional leak free poppet	16 ÷ 50	550 ÷ 4000 ($\Delta p = 5 \text{ bar}$)	H060
Control covers		ISO 7368	$\Delta p = 6 \text{ bar}$	
LIM, LIR, LIC	Pressure controls: relief, reducing, compensators	16 ÷ 80	160 ÷ 5400	H010
LIQV, LIDD	Flow controls: with manual setting for fine regulation or with stroke limiter	16 ÷ 63	60 ÷ 3500	H020
LIDEW, LIDBH	Directional controls: with solenoid valve and optional shuttle valve for pilot selection	16 ÷ 100	130 ÷ 8000	H030
LIDA, LIDO LIDB, LIDR	Check function: normally open/closed with optional hydraulic pilot operated check valves	16 ÷ 80	130 ÷ 5600	H040
LIDAS(H)	On-off active cartridges valves	16 ÷ 50	220 ÷ 2000	H050
Supplementary components				
/PE, /BT, /BBT, /EP	Components with special seals for extreme temperatures range or fire resistant fluids			TE010
SC LA-10 + CAPP	2 way cartridges and plugs size 10			TH020