



atos®

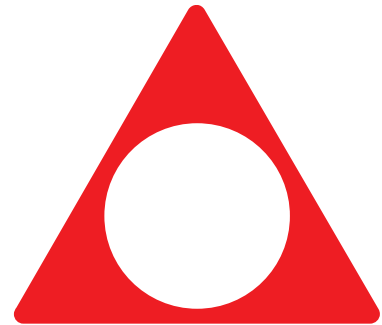

Distributed by Lynch Fluid Controls Inc.

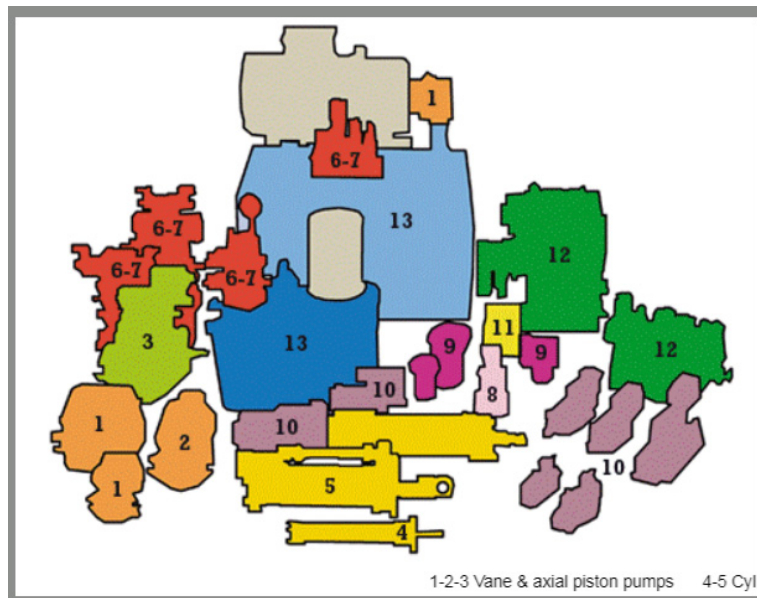

Toll Free
Tel: 1 (888) 626-4365
Fax: 1 (800) 263-5807

Local & International
Tel: +1 (905) 363-2400
Fax: +1 (905) 363-1191

Canada (Headquarters)
1799 Argentia Road
Mississauga, Ontario L5N 3A2

USA
3790 Commerce Court, Suite 500,
North Tonawanda, NY, 14120

Modular Valves

Pressure Control		Size ISO 4401	Max Flow l/min	Table
HMP HM, KM	modular relief valves, direct operated modular relief valves, pilot operated	06	35 60 ÷ 120	D120
HS, KS	modular sequence valves, direct or pilot operated	06, 10	40 ÷ 80	D130
HG, KG	modular reducing valves, 3-way, direct or pilot operated	06, 10	50 ÷ 100	D140
JPG-211 JPG-311	modular reducing valves, 2-way, pilot operated	16, 25	250 ÷ 300	
HC-011 KC-011 JPC-211	modular pressure compensators, direct or pilot operated	06, 10, 16	50 - 100 - 200	D150
Flow Control		ISO 4401		
HQ, KQ	modular flow control valves, restricted regulator in one direction with reversal free flow	06 - 10	80 ÷ 160	D160
JPQ-2, JPQ-3		16 - 25	200 ÷ 300	
DHQ, DKQ	modular valves for fast/slow speed control, composed by compensated flow valve and by-pass solenoid valve	06, 10	1,5 ÷ 24	D170
Check Valves		ISO 4401		
HR, KR	modular check valves, direct or pilot operated	06, 10	60 ÷ 120	D180
JPR-2, JPR-3	modular check valves, pilot operated	16, 25	200 ÷ 300	
Directional Control		ISO 4401		
HF-06** /FV	Modular shut-off solenoid directional valve with optional safety position switch	06	60	EY050
Pressure Switch				
MAP	pressure switches with fixed differential, maximum pressure 650 bar			D250