

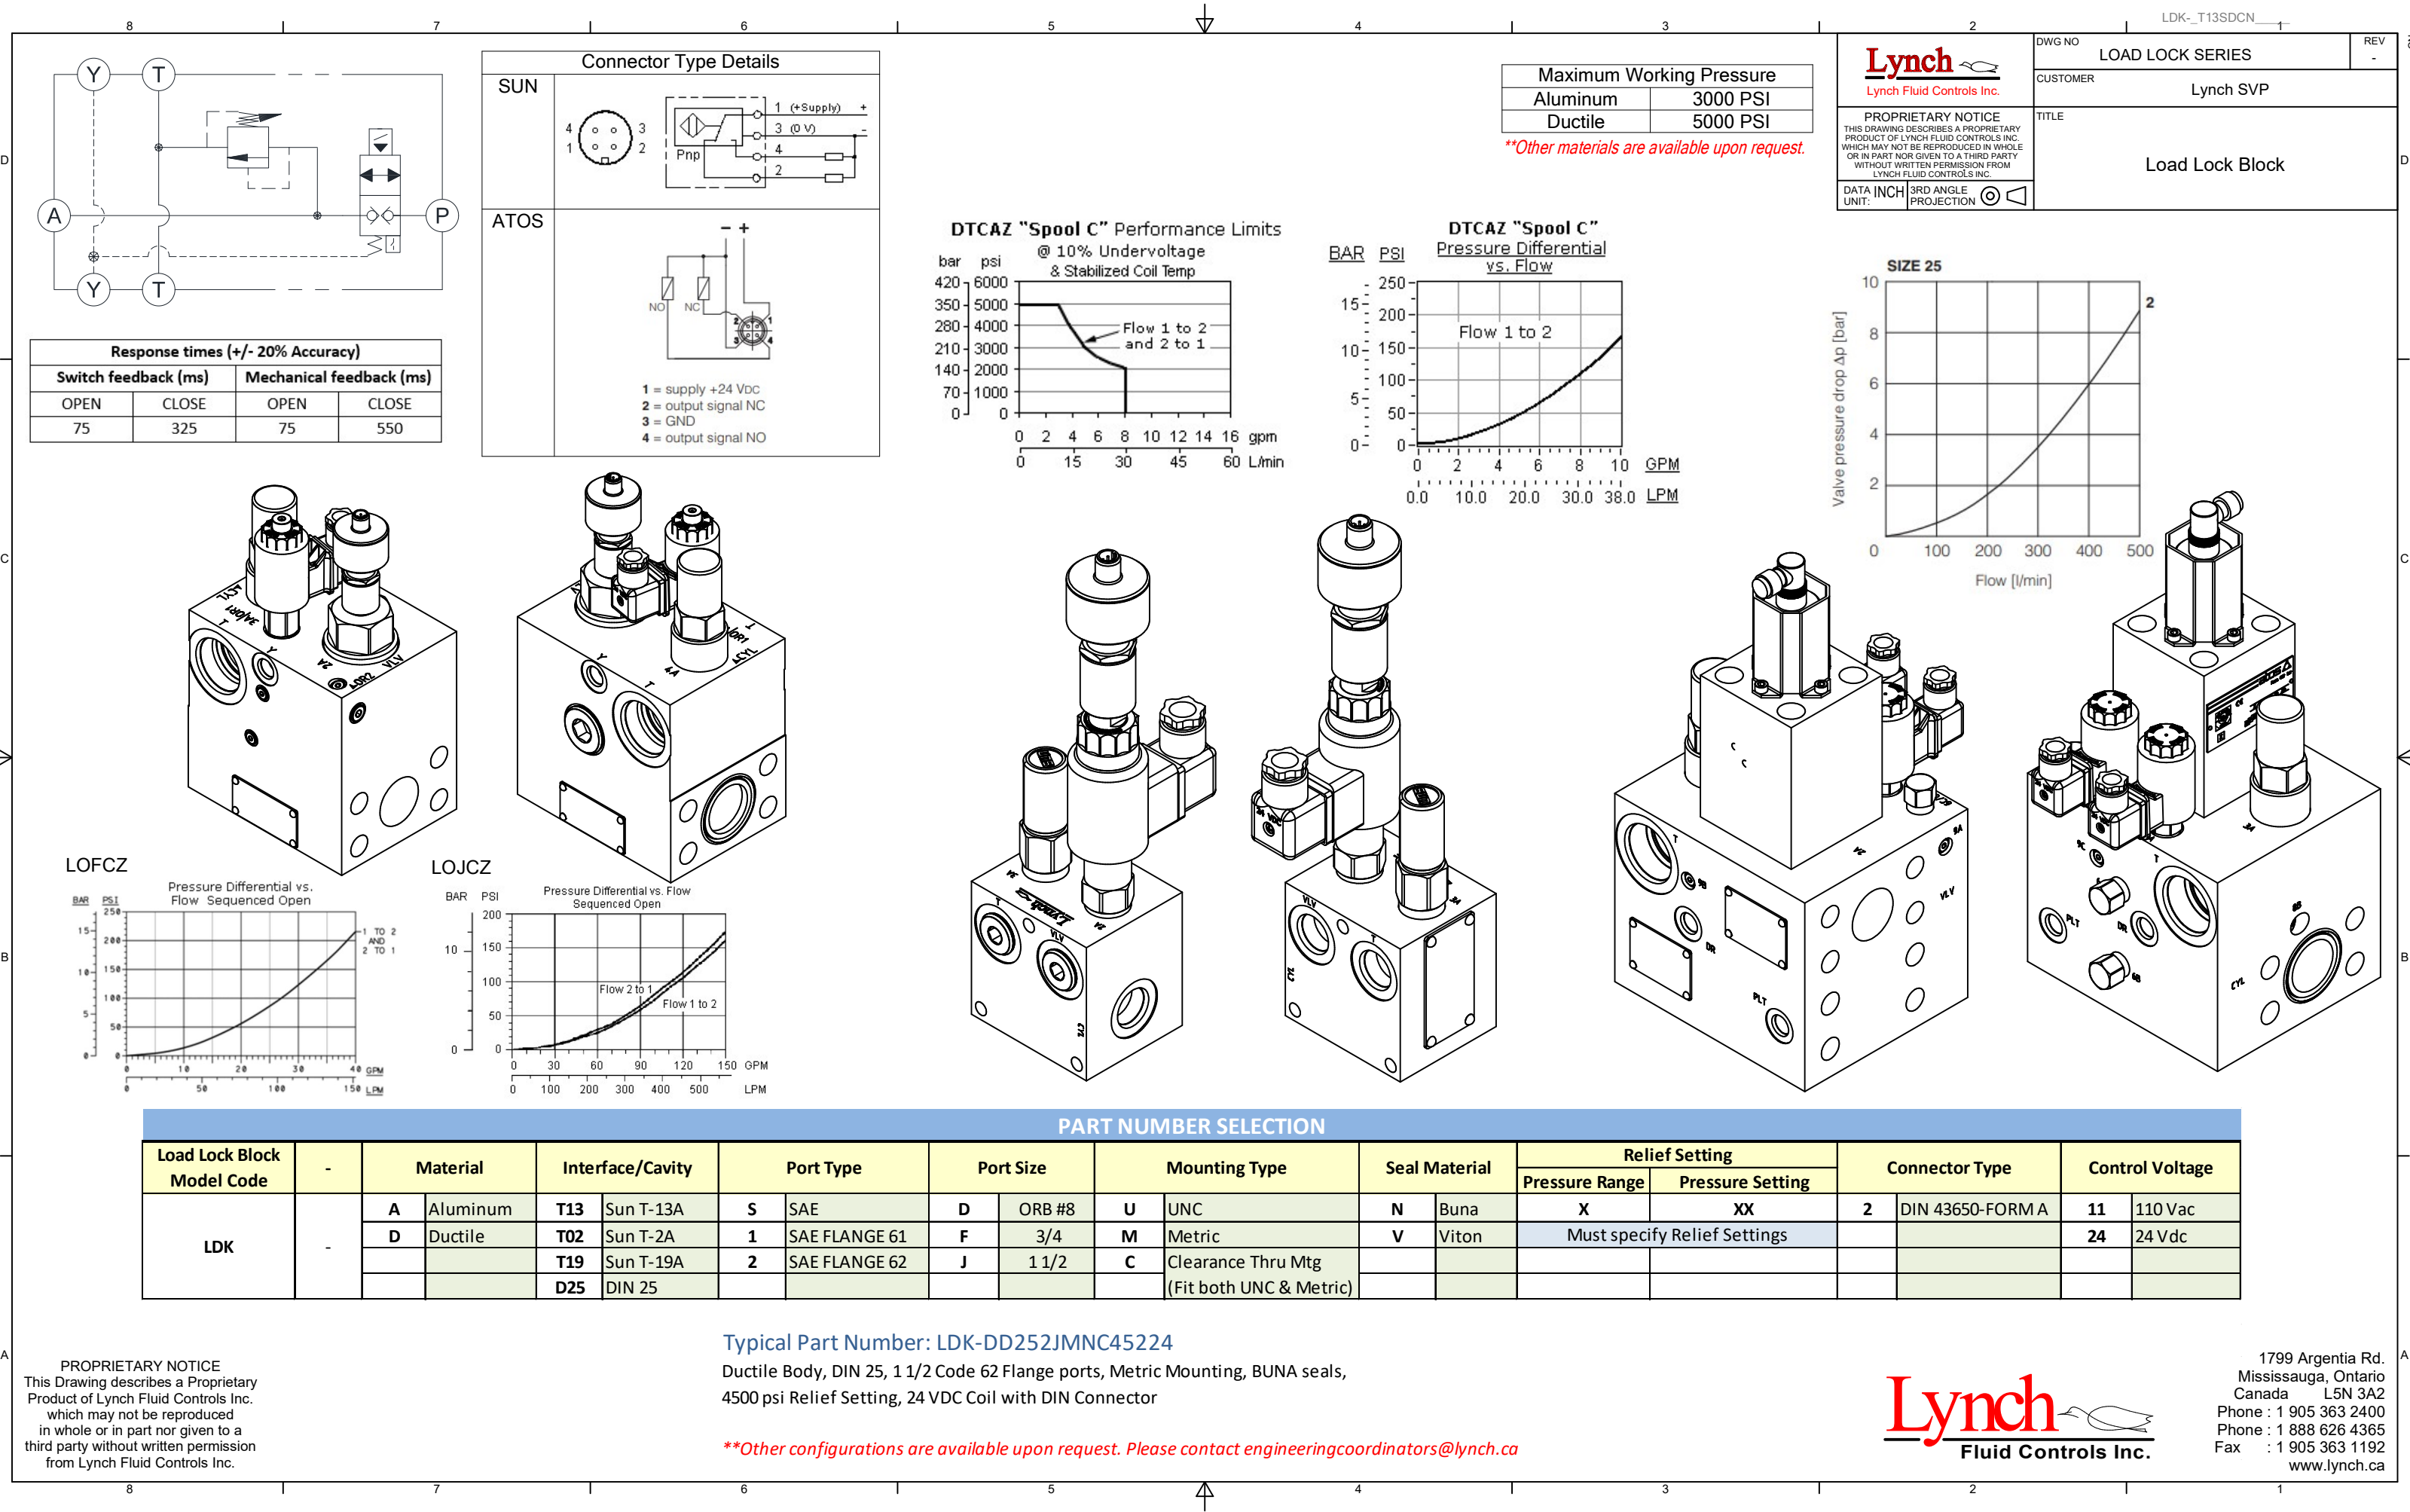
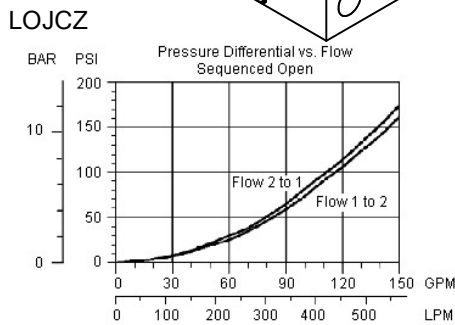
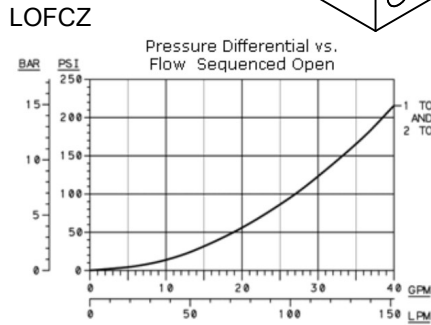
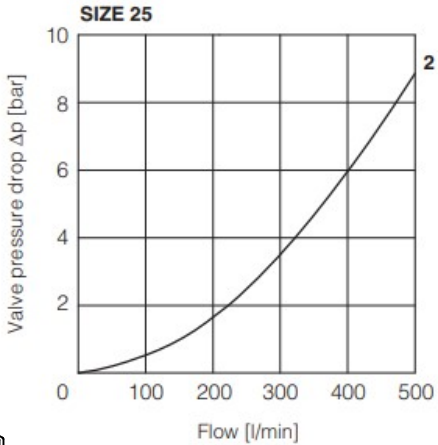
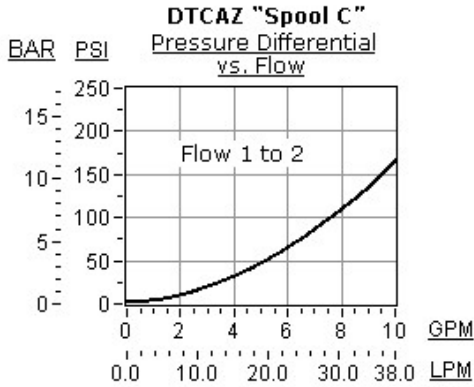


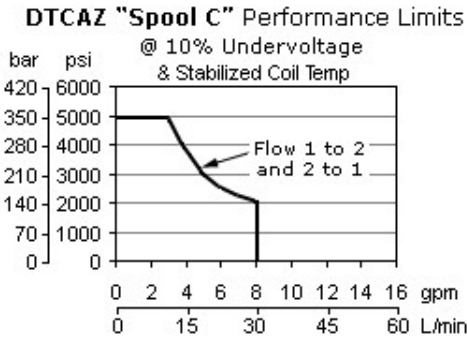

Response times (+/- 20% Accuracy)			
Switch feedback (ms)		Mechanical feedback (ms)	
OPEN	CLOSE	OPEN	CLOSE
75	325	75	550

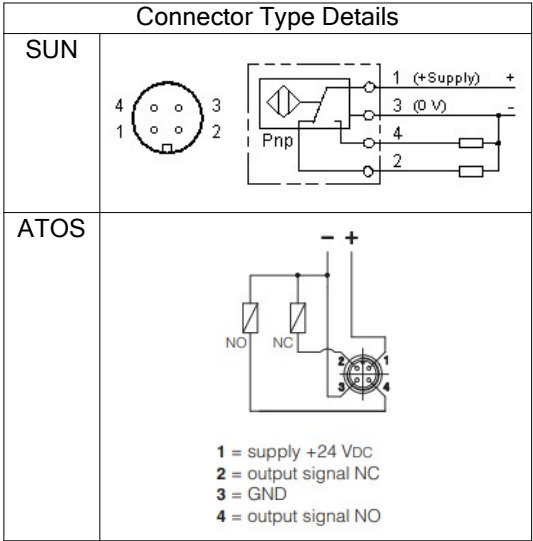

PART NUMBER SELECTION																			
Load Lock Block Model Code	-	Material		Interface/Cavity		Port Type		Port Size		Mounting Type		Seal Material		Relief Setting		Connector Type		Control Voltage	
														Pressure Range	Pressure Setting				
LDK	-	A	Aluminum	T13	Sun T-13A	S	SAE	D	ORB #8	U	UNC	N	Buna	X	XX	2	DIN 43650-FORM A	11	110 Vac
		D	Ductile	T02	Sun T-2A	1	SAE FLANGE 61	F	3/4	M	Metric	V	Viton	Must specify Relief Settings				24	24 Vdc
				T19	Sun T-19A	2	SAE FLANGE 62	J	1 1/2	C	Clearance Thru Mtg								
				D25	DIN 25						(Fit both UNC & Metric)								

Typical Part Number: LDK-DD252JMN45224

Ductile Body, DIN 25, 1 1/2 Code 62 Flange ports, Metric Mounting, BUNA seals, 4500 psi Relief Setting, 24 VDC Coil with DIN Connector

****Other configurations are available upon request. Please contact engineeringcoordinators@lynch.ca**

Lynch
Fluid Controls Inc.

1799 Argentia Rd.
Mississauga, Ontario
Canada L5N 3A2
Phone : 1 905 363 2400
Phone : 1 888 626 4365
Fax : 1 905 363 1192
www.lynch.ca